




结构紧凑、寿命长、性价比高、操作方便等特点

广泛应用于紫外固化、微电子、光盘雕刻、激光医疗、科学实验等领域

波长Wavelength (nm)	261±1	光束直径Dimensions of beam at the aperture (mm)	~2.0
输出功率Output power (mW)	>1, 2,3,	出光孔高度 Aperture Position(mm)	30
光斑模式Transverse mode	Near TEM00	偏振比Polarization ratio	>50:1 (Horizontal)
工作方式Operating mode	CW	工作温度Operating temperature (°C)	10~35
功率稳定性Power stability (rms, over 4 hours)	<10%	Power supply (90-264VAC or 5VDC)	VD-II-N
预热时间Warm-up time (minutes)	<10	使用寿命Expected lifetime (hours)	5000
光束质量M2 factor	<2.0	保修期Warranty	1 year

激光器机械尺寸图:

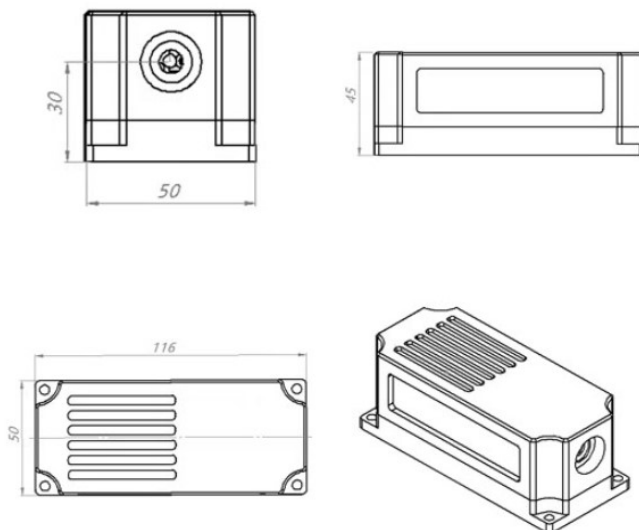

激光电源尺寸图:

