




|                                         |                      |                                |               |
|-----------------------------------------|----------------------|--------------------------------|---------------|
| 波长Wavelength (nm)                       | 640±5                | 出光孔高度 Aperture Position (mm)   | 51.5          |
| 工作方式 Working Mode                       | CW                   | 工作温度Operation Temperature (°C) | 10~35         |
| 输出功率 Output Power (mW)                  | >500, 600, ..., 1300 | 尺寸 Dimensions (L×W×H, mm)      | 160 x 60 x 65 |
| 功率稳定性Power Stability(rms, over 4 hours) | <1%, <2%, <3%        | 可配电源型号 Integrated Driver Model | VD-II-Q       |
| 光束直径Beam Diameter at Aperture (mm)      | 5.1×4.1              | 使用寿命Expected Lifetime (hours)  | 10000         |
| 光束发散角Beam Divergence (full angle, mrad) | <1.0                 | 保修期Warranty Time               | 1 year        |
| 预热时间Warm-up Time (minutes)              | <5                   |                                |               |

超紧凑、长寿命、成本低，操作简单  
用于科学实验、光学仪器、光学传感器、测量、通信、频谱分析等。

激光器机械尺寸图:

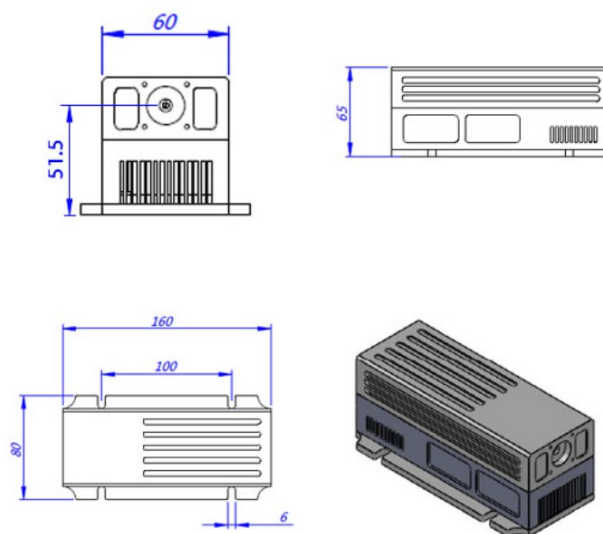

激光电源尺寸图:

